Vision is our mission®

Interface Box with Ext. speaker CAN/SRD/Camera
Article no. 0504820
2017 • DS0963260 EN A 01

Product Data

Dimensions

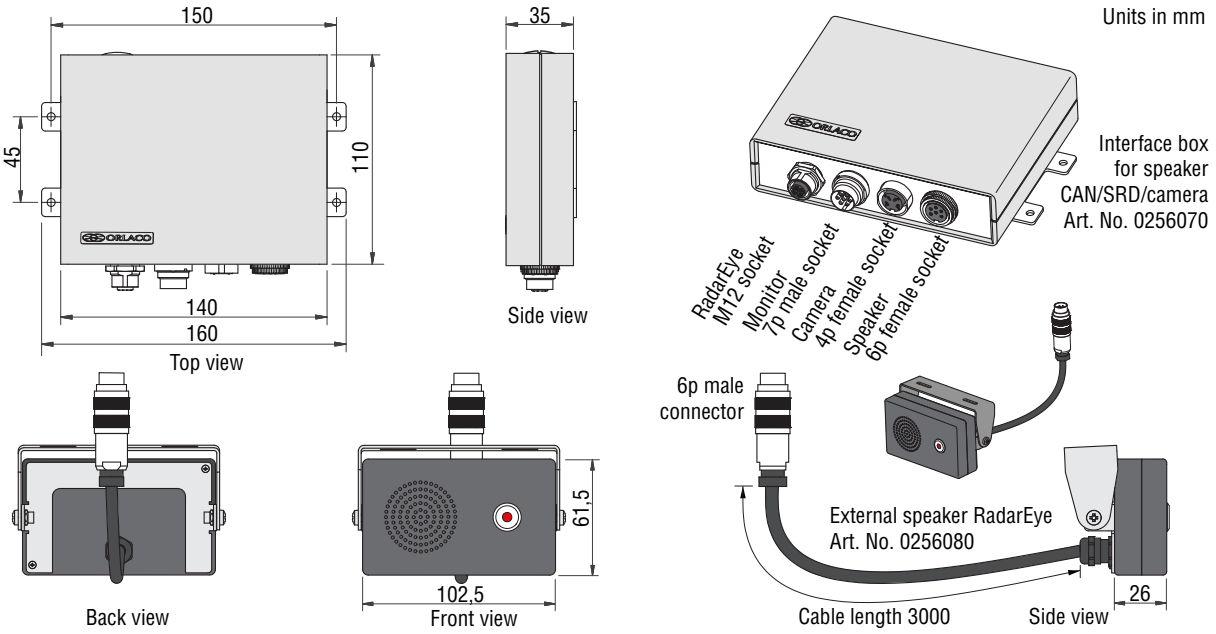

TECHNICAL DATA

Interface box with Ext. speaker CAN/SRD/Camera

Description

Article number	**0504820**

Interface box

Article number	**0256070**
Gereral	Interface is designed to connect the Orlaco RadarEye sets to a camera, monitor and external speaker.
Housing	Dimensions 140 x 110 x 35 mm
Input/output	External output 10A Resistive/24V max. NO contact. Externe output 10A secured. RS232, RS485.
Connectors	7p male socket to 7” monitor, 4p female socket to camera, 5p female socket to RadarEye set, 6p female socket to speaker.
Weight	176gr.

Speaker

Article number	**0256080**
Cable	3m cable, Art. No. 1220900 with 6p male connector, mounted on back side of speaker.
Housing	Dimensions 102,5 x 61,5 x 26 mm.
Bracket	Adjustable stainless steel bracket.
Sound pressure speaker	85dB(+-3dB) distance 1m.
Speaker box alarm light	LED, color red.

Manuals For user - and installation instructions see User Manual UM0972110 and System Manual SM0974110

Electrical connection

RadarEye M12



1 = PWR
2 = CAN L
3 = 0V
4 = CAN H

Front side
5P Female M12 socket
to RadarEye set

Monitor



1 = Video
2 = Video-GND
3 = PWR
4 = 0V
5 = CAN L
6 = CAN H

Front side
7P Male socket
to Monitor

Camera



1 = Video
2 = Video GND
3 = Power
4 = 0V

Front side
4P Female socket
to Camera

Speaker



2 = White = Led
3 = Red = Led
4 = Blue = Speaker
5 = Brown = Speaker

Front side
6P Female socket
to Speaker

Print connections (Inside Interface box)

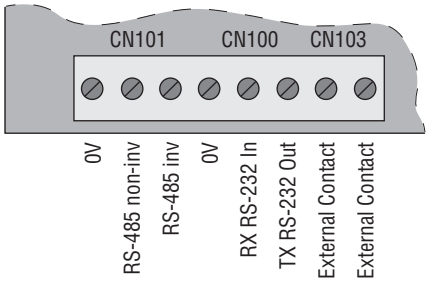

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.